

TROX TRV

BUILDING
INSTALLA-
TIONS

BUILDING
CONTROLS

DISTRICT
HEATING
& GAS

LAB

EMERGENCY
SHOWER
SYSTEMS

BROEN

INTELLIGENT FLOW SOLUTIONS

Indholdsfortegnelse

Køling

TRV TecTite (OEM) 3

Appendix 4

TRV TecTite (OEM)

Tekniske
egenskaber



Materiale:

Ventilhus

Varmpresset
messing

Indsats

Messing

Fjeder

Rustfrit stål

Tryk &
temperatur:

Temperatur: 110 °C

Trykklasse: PN 10


Max. differenstryk 60 kPa

Medie:

Vand
Ethylene /
propylene Glycol

Aktuator:
(tilbehør)

BROEN aktuator
med VA80 adaptor

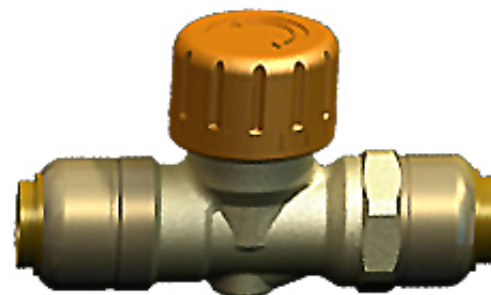

Broen Nr.	Dimension	Tekst	KV	L1
	DN15 x 10mm	Radiatorventil TecTite (push x push) LL	0,05 - 0,82 (KVS 0,05 - 1,00)	98mm
	DN15 x 12mm	Radiatorventil TecTite (push x push) LL	0,05 - 0,82 (KVS 0,05 - 1,00)	98mm
L221003001	DN15 x 15mm	Radiatorventil TecTite (push x push) LL	0,05 - 0,95 (KVS 0,05 - 1,20)	98mm
	DN15 x 10mm	Radiatorventil TecTite (push x push) VL	0,05 - 0,95 (KVS 0,05 - 1,20)	
	DN15 x 12mm	Radiatorventil TecTite (push x push) VL	0,05 - 0,95 (KVS 0,05 - 1,20)	
	DN15 x 15mm	Radiatorventil TecTite (push x push) VL	0,05 - 1,00 (KVS 0,05 - 1,40)	

